

Configuration and Dimensions

	28.15	34.15	40.15	46.15	52.15	58.15
A	25.875	31.875	37.875	43.875	49.875	55.875
B	29.75	35.75	41.75	47.75	53.75	59.75
C	14.75	14.75	14.75	14.75	14.75	14.75
D	15.75	15.75	15.75	15.75	15.75	15.75
E	11.375	11.375	11.375	11.375	11.375	11.375
F	11.5	11.5	11.5	11.5	11.5	11.5
G	4.875	4.875	4.875	4.875	4.875	4.875
H	2.375	2.375	2.375	2.375	2.375	2.375
I	14.625	20.25	26.25	32.25	38.75	44.25
J	1.875	1.875	1.875	1.875	1.875	1.875
K	.625	.625	.625	.625	.625	.625
L	13	13	13	13	13	13
M	6.5	6.5	6.5	6.5	6.5	6.5



Hurricane PLJL The Next Generation of Professional Series Custom Range Hood Inserts is available now in the ProLine Hurricane Insert Series. The Hurricane has been designed from the ground up to be easy to specify and configure, easy to install and most importantly, easy to clean and 100% Stainless Steel, ensure that this insert will perform flawlessly for years.


Hood Type Insert

Features

Control Type Push Buttons with LED display
Lighting LED

Ventilation System

Maximum Air Flow Capacity 600 or 1200 CFM
Speed Levels 4 Speeds
Airflow (Quiet/Low/Med/High) 150/300/450/600
or 300/600/900/1200
Noise Level 53.8 db or 6.0 Sones Max.
Duct Type/Size Round 6/8
Voltage 110v
Motor Single or Dual
Filter Type Stainless Steel Baffle (Dishwasher Safe)
Material High Quality 430 Stainless Steel
Warranty 3 Year Parts Warranty

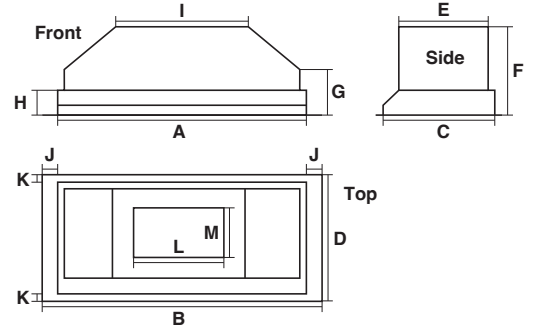

Configuration and Dimensions

	28.18	34.18	40.18	46.18	52.18	58.18
A	25.875	31.875	37.875	43.875	49.875	55.875
B	29.75	35.75	41.75	47.75	53.75	59.75
C	17.625	17.625	17.625	17.625	17.625	17.625
D	18.75	18.75	18.75	18.75	18.75	18.75
E	14.375	14.375	14.375	14.375	14.375	14.375
F	11.5	11.5	11.5	11.5	11.5	11.5
G	4.875	4.875	4.875	4.875	4.875	4.875
H	2.375	2.375	2.375	2.375	2.375	2.375
I	14.625	20.25	26.25	32.25	38.75	44.25
J	1.875	1.875	1.875	1.875	1.875	1.875
K	.625	.625	.625	.625	.625	.625
L	13	13	13	13	13	13
M	6.5	6.5	6.5	6.5	6.5	6.5



Hurricane PLJL The Next Generation of Professional Series Custom Range Hood Inserts is available now in the ProLine Hurricane Insert Series. The Hurricane has been designed from the ground up to be easy to specify and configure, easy to install and most importantly, easy to clean and 100% Stainless Steel, ensure that this insert will perform flawlessly for years.


Hood Type Insert

Features

Control Type Push Buttons with LED display
Lighting LED

Ventilation System

Maximum Air Flow Capacity 600 or 1200 CFM
Speed Levels 4 Speeds
Airflow (Quiet/Low/Med/High). 150/300/450/600
or 300/600/900/1200
Noise Level 53.8 db or 6.0 Sones Max.
Duct Type/Size Round 6/8
Voltage 110v
Motor Single or Dual
Filter Type Stainless Steel Baffle (Dishwasher Safe)
Material High Quality 430 Stainless Steel
Warranty 3 Year Parts Warranty

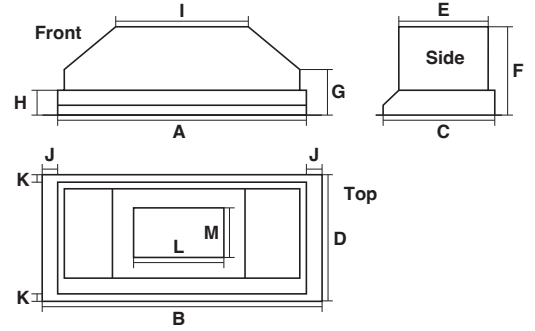

Configuration and Dimensions

	28.21	34.21	40.21	46.21	52.21	58.21
A	25.875	31.875	37.875	43.875	49.875	55.875
B	29.75	35.75	41.75	47.75	53.75	59.75
C	20.625	20.625	20.625	20.625	20.625	20.625
D	21.75	21.75	21.75	21.75	21.75	21.75
E	17.375	17.375	17.375	17.375	17.375	17.375
F	11.5	11.5	11.5	11.5	11.5	11.5
G	4.875	4.875	4.875	4.875	4.875	4.875
H	2.375	2.375	2.375	2.375	2.375	2.375
I	14.625	20.25	26.25	32.25	38.75	44.25
J	1.875	1.875	1.875	1.875	1.875	1.875
K	.625	.625	.625	.625	.625	.625
L	13	13	13	13	13	13
M	6.5	6.5	6.5	6.5	6.5	6.5



Hurricane PLJL The Next Generation of Professional Series Custom Range Hood Inserts is available now in the ProLine Hurricane Insert Series. The Hurricane has been designed from the ground up to be easy to specify and configure, easy to install and most importantly, easy to clean and 100% Stainless Steel, ensure that this insert will perform flawlessly for years.

Hood Type Insert

Features

Control Type Push Buttons with LED display
Lighting LED

Ventilation System

Maximum Air Flow Capacity 600 or 1200 CFM
Speed Levels 4 Speeds
Airflow (Quiet/Low/Med/High). 150/300/450/600
or 300/600/900/1200
Noise Level 53.8 db or 6.0 Sones Max.
Duct Type/Size Round 6/8
Voltage 110v
Motor Single or Dual
Filter Type Stainless Steel Baffle (Dishwasher Safe)
Material High Quality 430 Stainless Steel
Warranty 3 Year Parts Warranty